

KT-08 EXCAVATOR

Shandong Hilt Machinery Co., Ltd.



Model	KT-08	Max.Digging Depth	1300mm
Engine	KOOP 192F	Max.Digging Height	2350mm
Power	8.6kw	Max.Dumping Height	1600mm
Bucket Capacity	0.022m³	Total Length	2430mm
Driving Speed	1km/h	Total Width	720mm
Driving Slope	30°	Total Height	1390mm

Product introduction :



Soft and powerful action, fast driving speed, low engine temperature, energy saving and fuel saving



Comfortable seat, in line with ergonomics, makes the operation more comfortable and convenient for the staff



Strong cylinder,im-ported seals, goodflexibility,longeruse time



Double hand front operation system,easyto operate



The bulldozer blade is widened and thickened,durable




The pin comes with grease fitting,more lubricating



KT-10 EXCAVATOR

Shandong Hilt Machinery Co., Ltd.

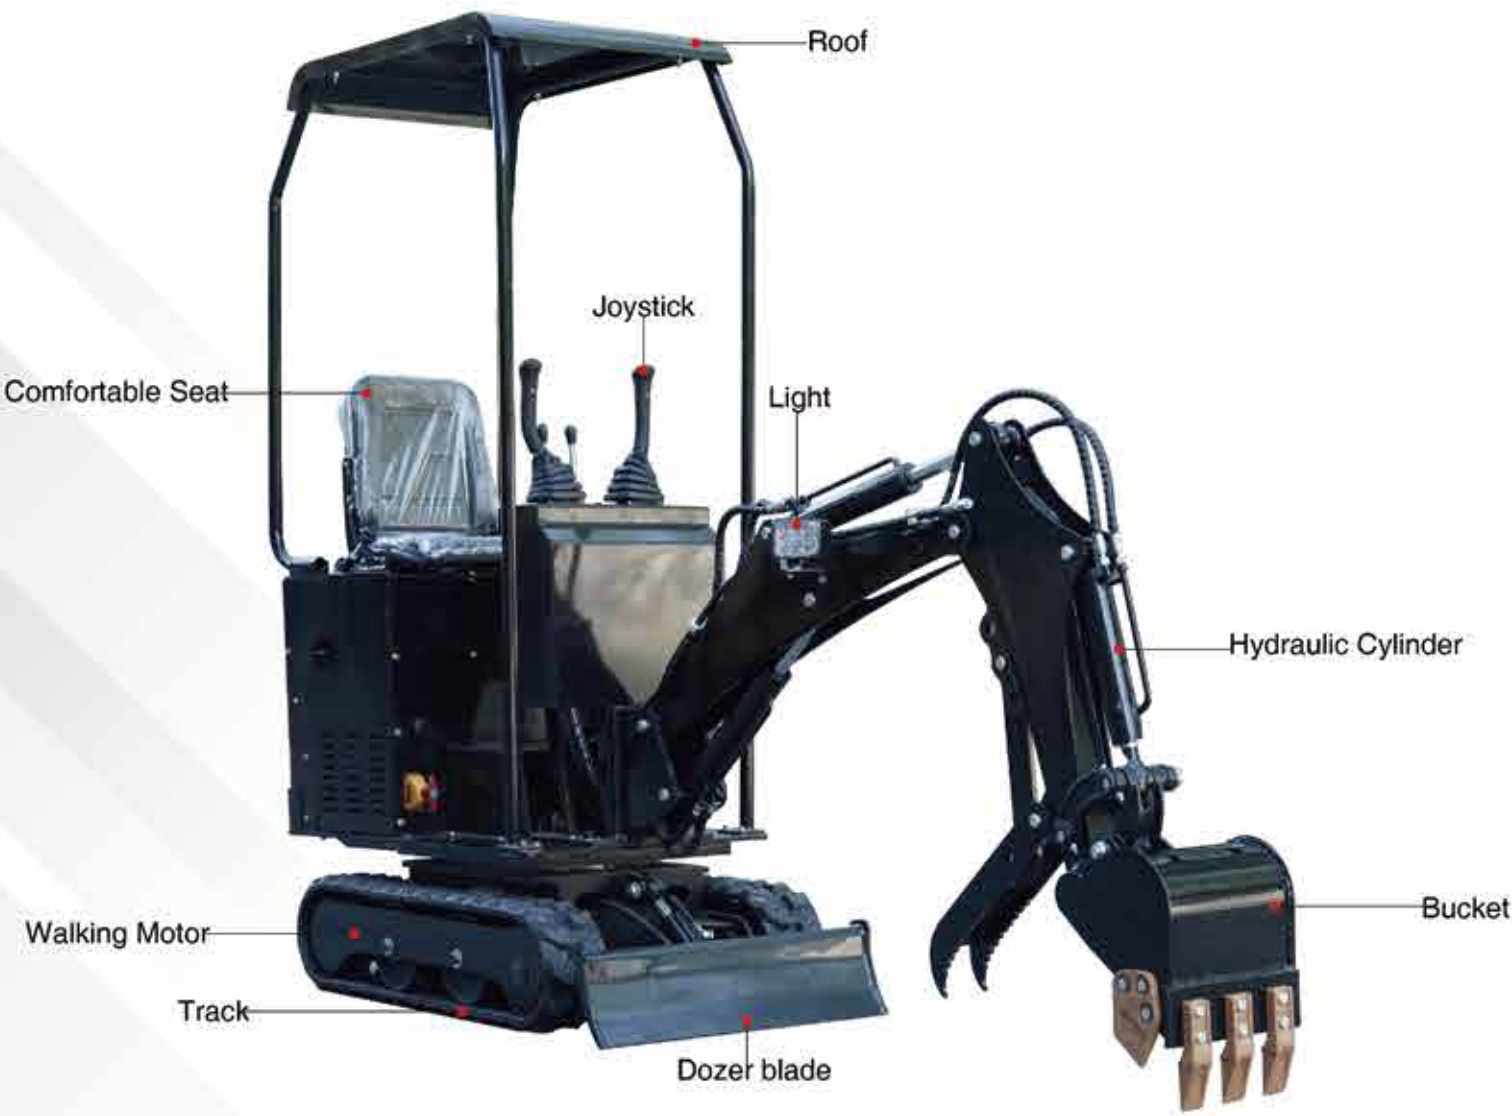

Model	KT-10	Max.Digging Depth	1300mm
Engine	K00P/ChangChai 192F	Max.Digging Height	2350mm
Power	8.6kw	Max.Dumping Height	1600mm
Bucket Capacity	0.022m ³	Total Length	2450mm
Driving Speed	1km/h	Total Width	730mm
Driving Slope	30°	Total Height	1390mm

Product introduction :



The bucket is enlarged and thickened, and other accessories can be replaced to suit different tasks.



Self-contained counter weight, increase the weight of the body and improve the stability of the vehicle



The bulldozer blade is widened and thickened,durable



Stable hydraulic cylinder, good sealing, not easy to leak oil



Simple operating handle, easy to operate



Thick wear-resistant track, stable and not easy to fall off



KT-12 EXCAVATOR

Shandong Hilt Machinery Co., Ltd.



Model	KT-12	Crawler grounding length	1200mm
Operation weigKT	850kg	Crawler width	180mm
Engine	Koop192	Max digging heigKT	2580mm
Power	7.6kw	Max discharge heigKT	1745mm
Bucket capacity	0.03CBM	Max digging depth	1700mm
Rotation speed	11r/min	Max digging radius	3030mm
Overall dimension	2870*1000*2030/2285mm	Mini turning radius	1290mm

Product introduction :



Engine compartment



Comfortable seat



Body weigKT



Armrest box



Bucket (replaceable accessories)



Wear-resistant rubber tracks



KT-15 EXCAVATOR

Shandong Hilt Machinery Co., Ltd.



Model	KT-15	Crawler grounding length	1250mm
Operation weight	1100kg	Crawler width	180mm
Engine	Koop/Laidon/ Kubota	Max digging height	2550mm
Power	14kw/2500r/min	Max discharge height	1700mm
Bucket capacity	0.028CBM	Max digging depth	1650mm
Rotation speed	11r/min	Max digging radius	2850mm
Overall dimension	2775*1000*2200mm	Mini turning radius	1290mm

Product introduction:



KT-15 EXCAVATOR

Shandong Hilt Machinery Co., Ltd.



Model	KT-15	Crawler grounding length	1250mm
Operation weigKT	1100kg	Crawler width	180mm
Engine	Koop/Laidon/ Kubota	Max digging heigKT	2550mm
Power	14kw/2500r/min	Max discharge heigKT	1700mm
Bucket capacity	0.028CBM	Max digging depth	1650mm
Rotation speed	11r/min	Max digging radius	2850mm
Overall dimension	2775*1000*2200mm	Mini turning radius	1290mm

Product introduction :



Engine compartment



Hydraulic pilot operation



Hydraulic cylinder



Walking motor



Stable chassis



Wear-resistant rubber tracks



KT-17 EXCAVATOR

Shandong Hilt Machinery Co., Ltd.



Model	KT-17	Crawler grounding length	1250mm
Operation weigKT	1700kg	Crawler width	180mm
Engine	Briggs & Stratton	Max digging heigKT	2550mm
Power	14kw/2500r/min	Max discharge heigKT	1700mm
Bucket capacity	0.028CBM	Max digging depth	1650mm
Rotation speed	11r/min	Max digging radius	2850mm
Overall dimension	2775*1000*2200mm	Mini turning radius	1290mm

Product introduction :



Engine compartment



Hydraulic pilot operation



Hydraulic cylinder



Walking motor



Stable chassis



Wear-resistant rubber tracks



KT-18 EXCAVATOR

Shandong Hilt Machinery Co., Ltd.



Model	KT-18	Crawler grounding length	1300mm
Operation weigKT	1470kg	Crawler width	180mm
Engine	Kubota/yanmar	Max digging heigKT	3200mm
Power	10kw/10.3kw	Max discharge heigKT	2300mm
Bucket capacity	0.05CBM	Max digging depth	2200mm
Rotation speed	9r/min	Max digging radius	3360mm
Overall dimension	3250*1100*2300mm	Mini turning radius	1350mm

Product introduction :



Engine compartment



Toyota seats



Hydraulic cylinder



Bucket (replaceable accessories)



Excavator ceiling




Wear-resistant rubber tracks




KT-20 EXCAVATOR

Shandong Hilt Machinery Co., Ltd.

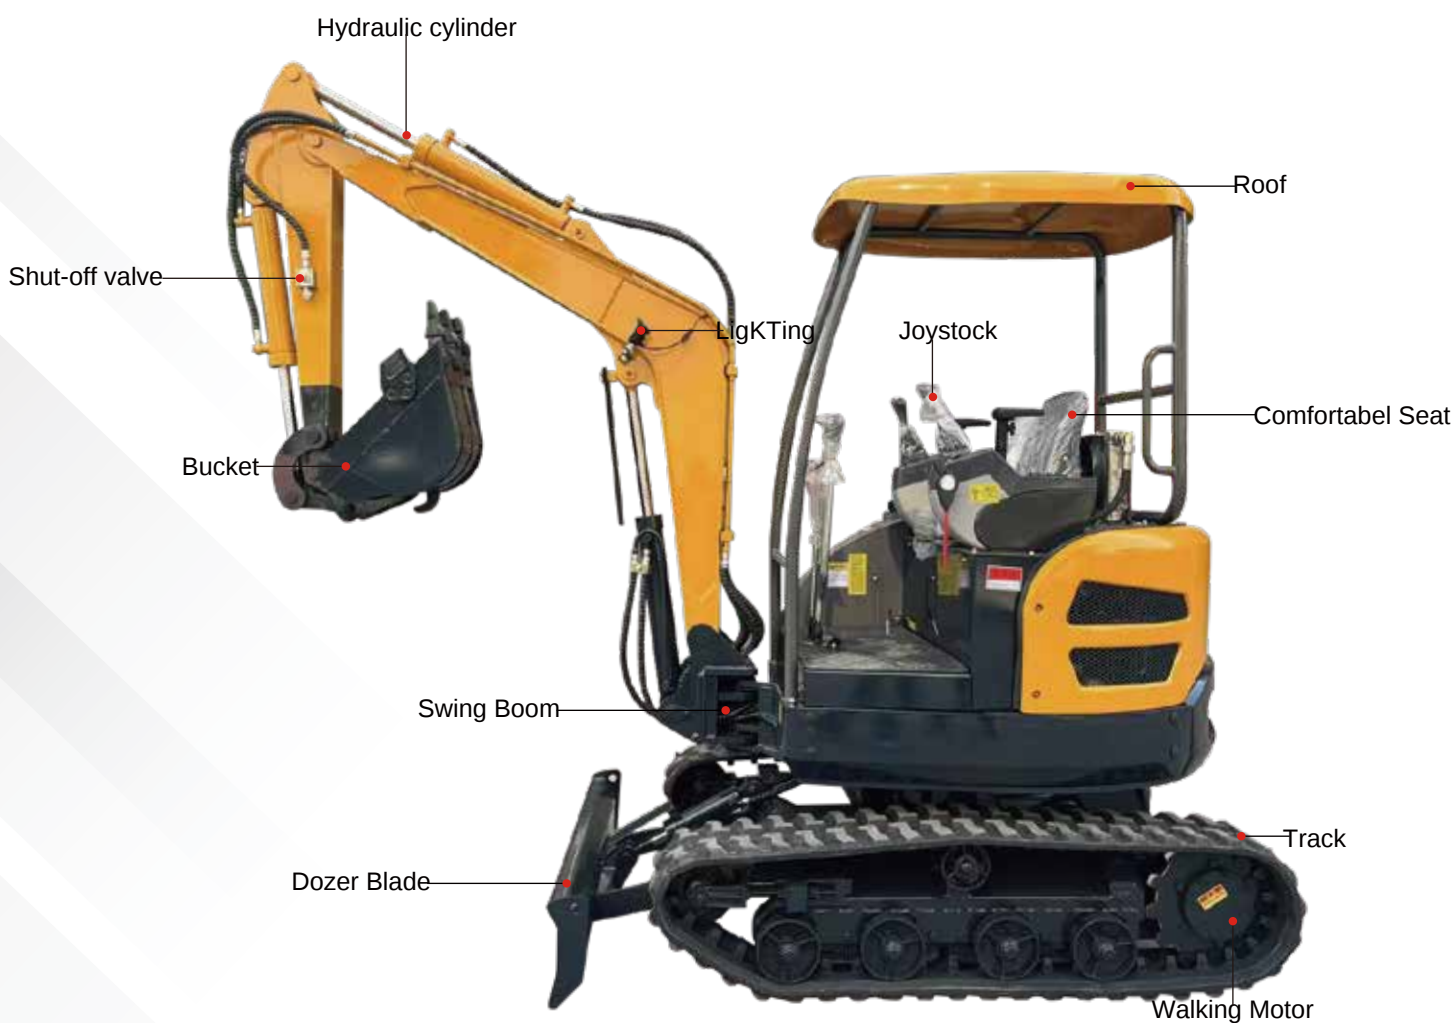

Model	KT-20	Max.Digging Depth	2200mm
Engine	LaiDong385(Three-cylinder)	Max.Digging HeigKT	3200mm
Power	22.1kw/30HP	Max.Dumping HeigKT	2150mm
Bucket Capacity	0.04m³	Total Length	3750mm
Driving Speed	1.5-2km/h	Total Width	1400mm
Driving Slope	30°	Total HeigKT	2400mm

Product introduction:

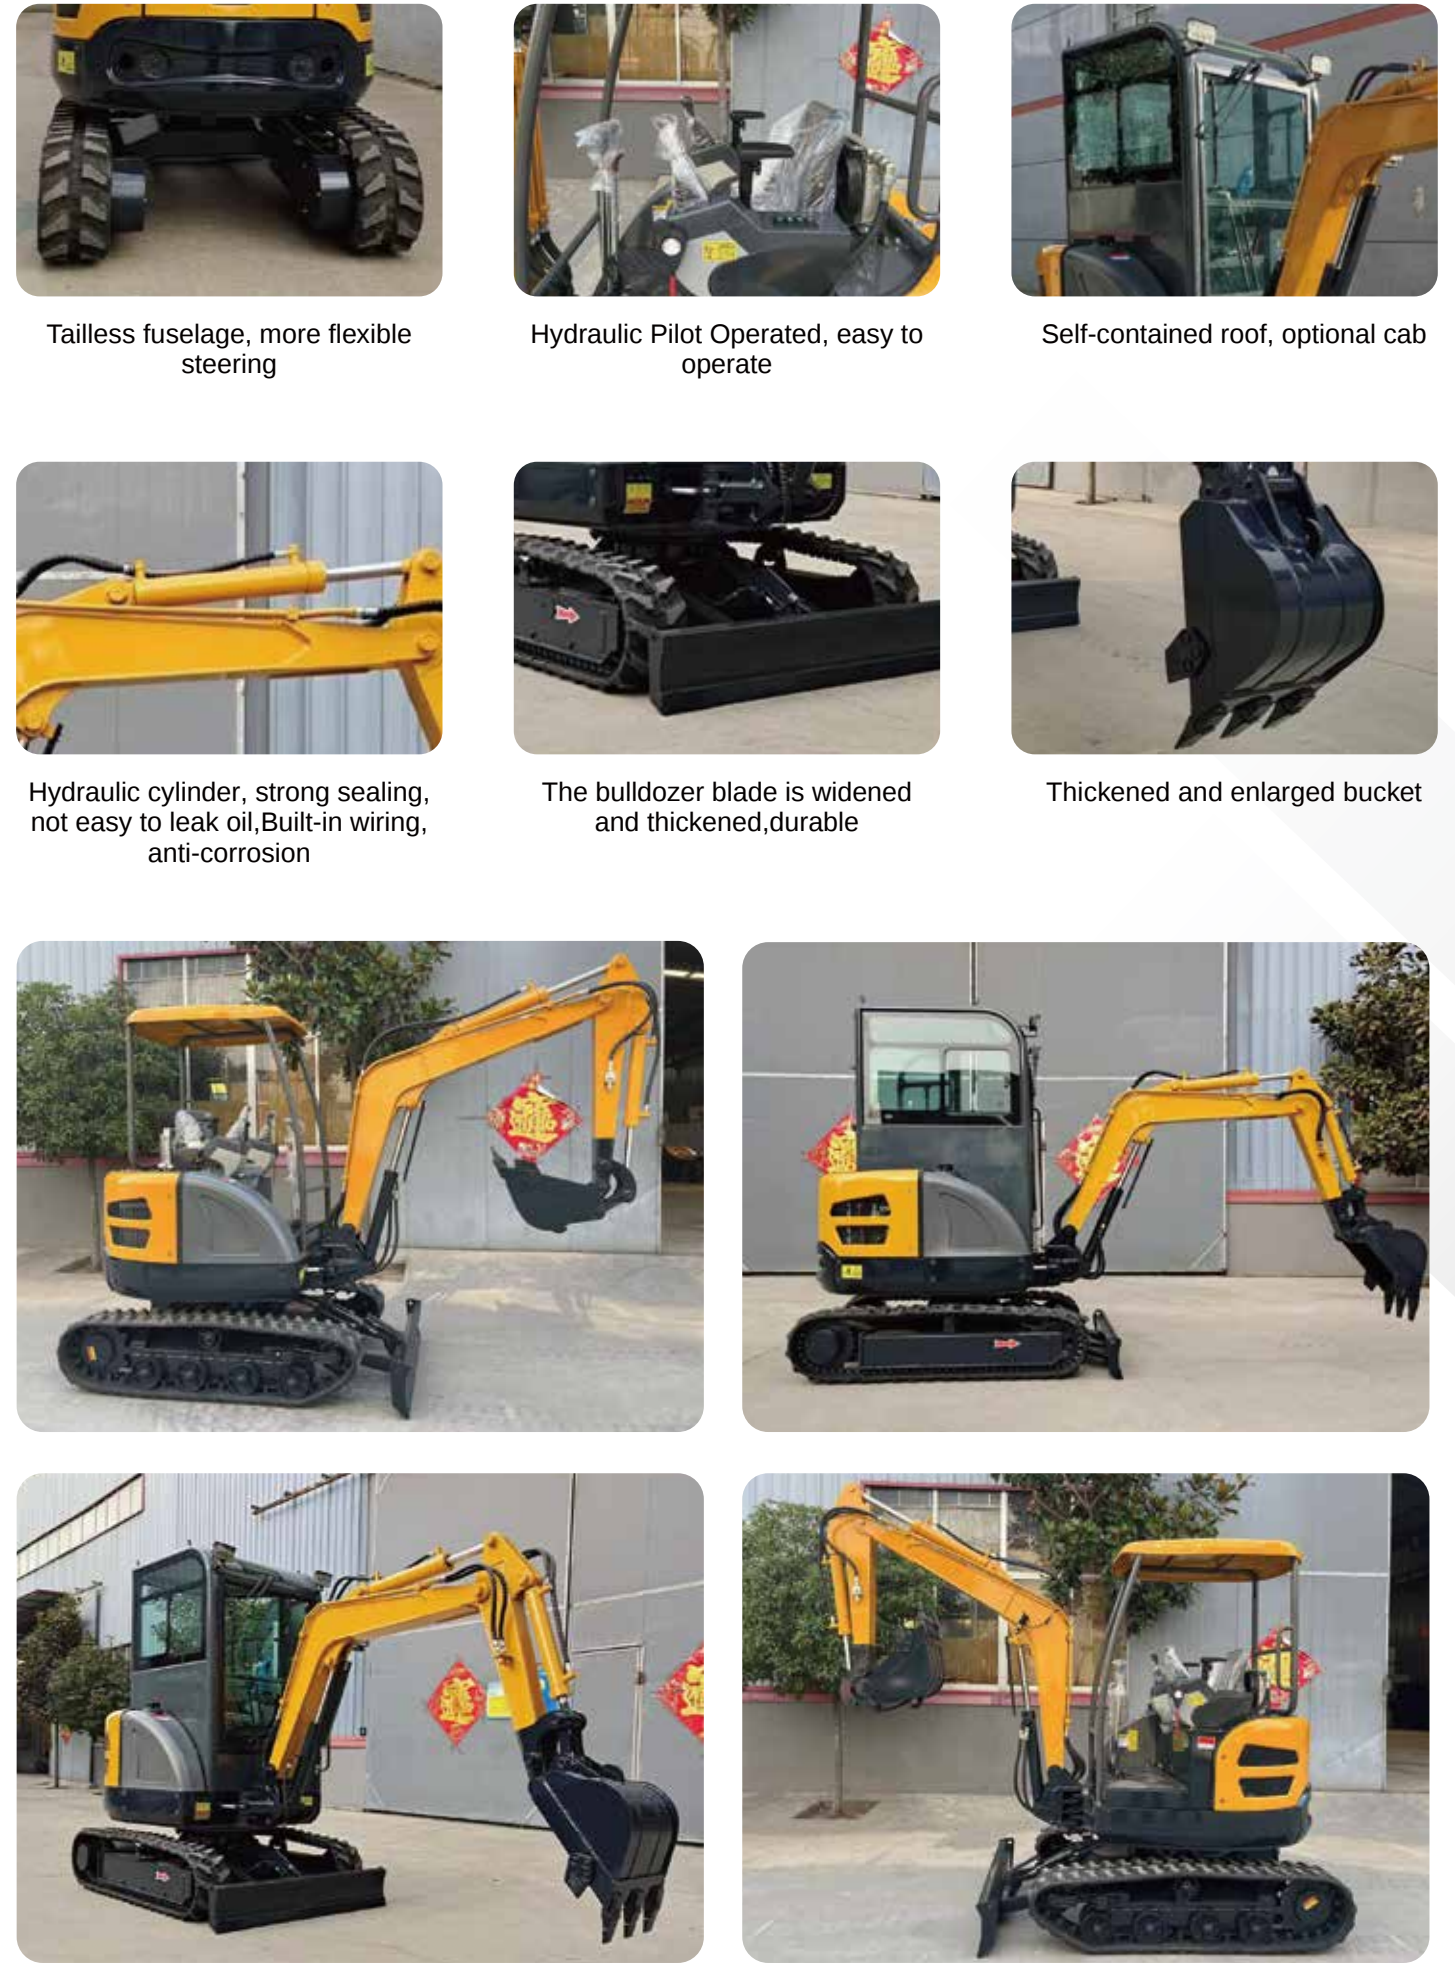

KT-20 EXCAVATOR

Shandong Hilt Machinery Co., Ltd.



Model	KT-20	Crawler grounding length	1300mm
Operation weigKT	2000kg	Crawler width	180mm
Engine	Kubota	Max digging heigKT	3200mm
Power	10kw/10.3kw	Max discharge heigKT	2300mm
Bucket capacity	0.05CBM	Max digging depth	2200mm
Rotation speed	9r/min	Max digging radius	3360mm
Overall dimension	3250*1100*2300mm	Mini turning radius	1350mm

Product introduction :



Engine compartment



Toyota seats



Hydraulic cylinder



Bucket (replaceable accessories)



Excavator ceiling




Wear-resistant rubber tracks



KT-20 EXCAVATOR

Shandong Hilt Machinery Co., Ltd.

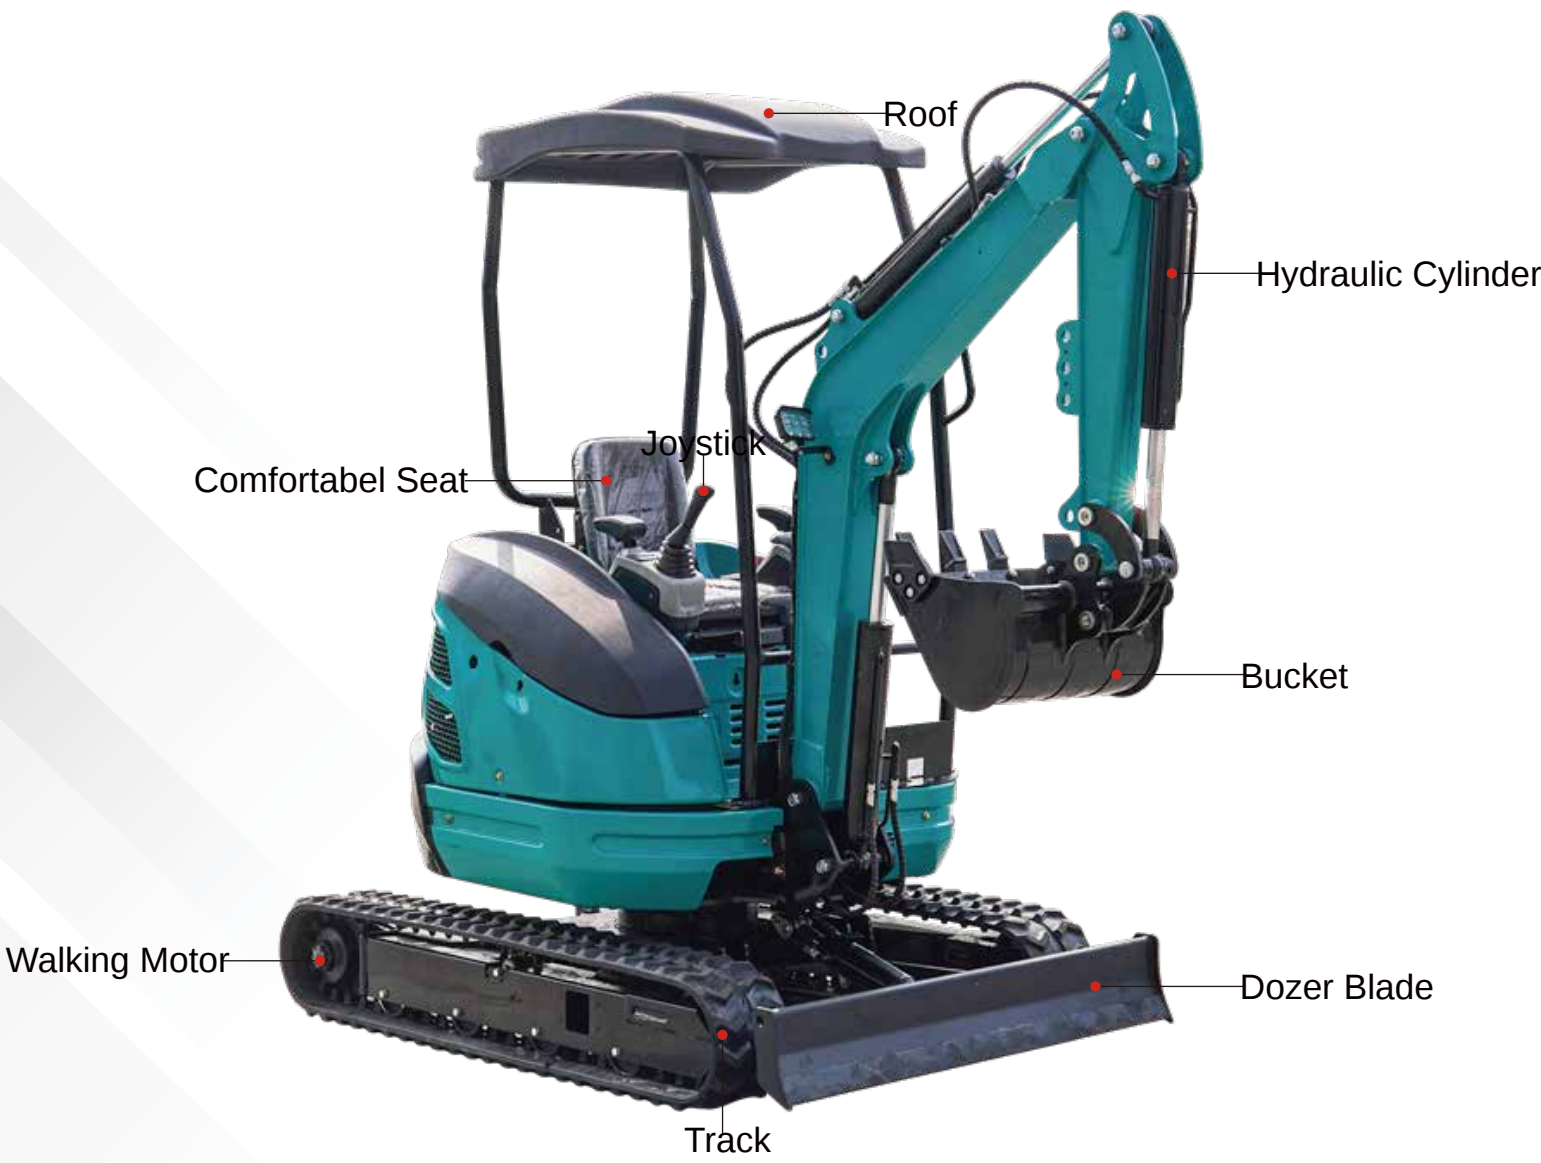

Model	KT-20	Crawler grounding length	1600mm
Operation weigKT	1670KG	Crawler width	230mm
Engine	Kubota/yanmar	Max digging heigKT	3200mm
Power	11.9kw/11.2kw	Max discharge heigKT	2450mm
Bucket capacity	0.05CBM	Max digging depth	2350mm
Rotation speed	9r/min	Max digging radius	3360mm
Overall dimension	3350*1150*2300mm	Mini turning radius	1350mm

Product introduction :



Engine compartment



Hydraulic pilot operation



Hydraulic cylinder



Bucket (replaceable accessories)



Excavator ceiling



Wear-resistant rubber tracks



KT-22 EXCAVATOR

Shandong Hilt Machinery Co., Ltd.



Model	KT-22	Max.Digging Depth	2200mm
Engine	LaiDong385(Three-cylinder)	Max.Digging HeigKT	3200mm
Power	22.1kw/30HP	Max.Dumping HeigKT	2150mm
Bucket Capacity	0.04m³	Total Length	3750mm
Driving Speed	1.5-2km/h	Total Width	1400mm
Driving Slope	30°	Total HeigKT	2400mm

Product introduction:



Tailless fuselage, more flexible steering



Hydraulic Pilot Operated, easy to operate



Self-contained roof, optional cab



Hydraulic cylinder, strong sealing, not easy to leak oil,Built-in wiring, anti-corrosion



The bulldozer blade is widened and thickened,durable




Thickened and enlarged bucket



KT-22 EXCAVATOR

Shandong Hilt Machinery Co., Ltd.

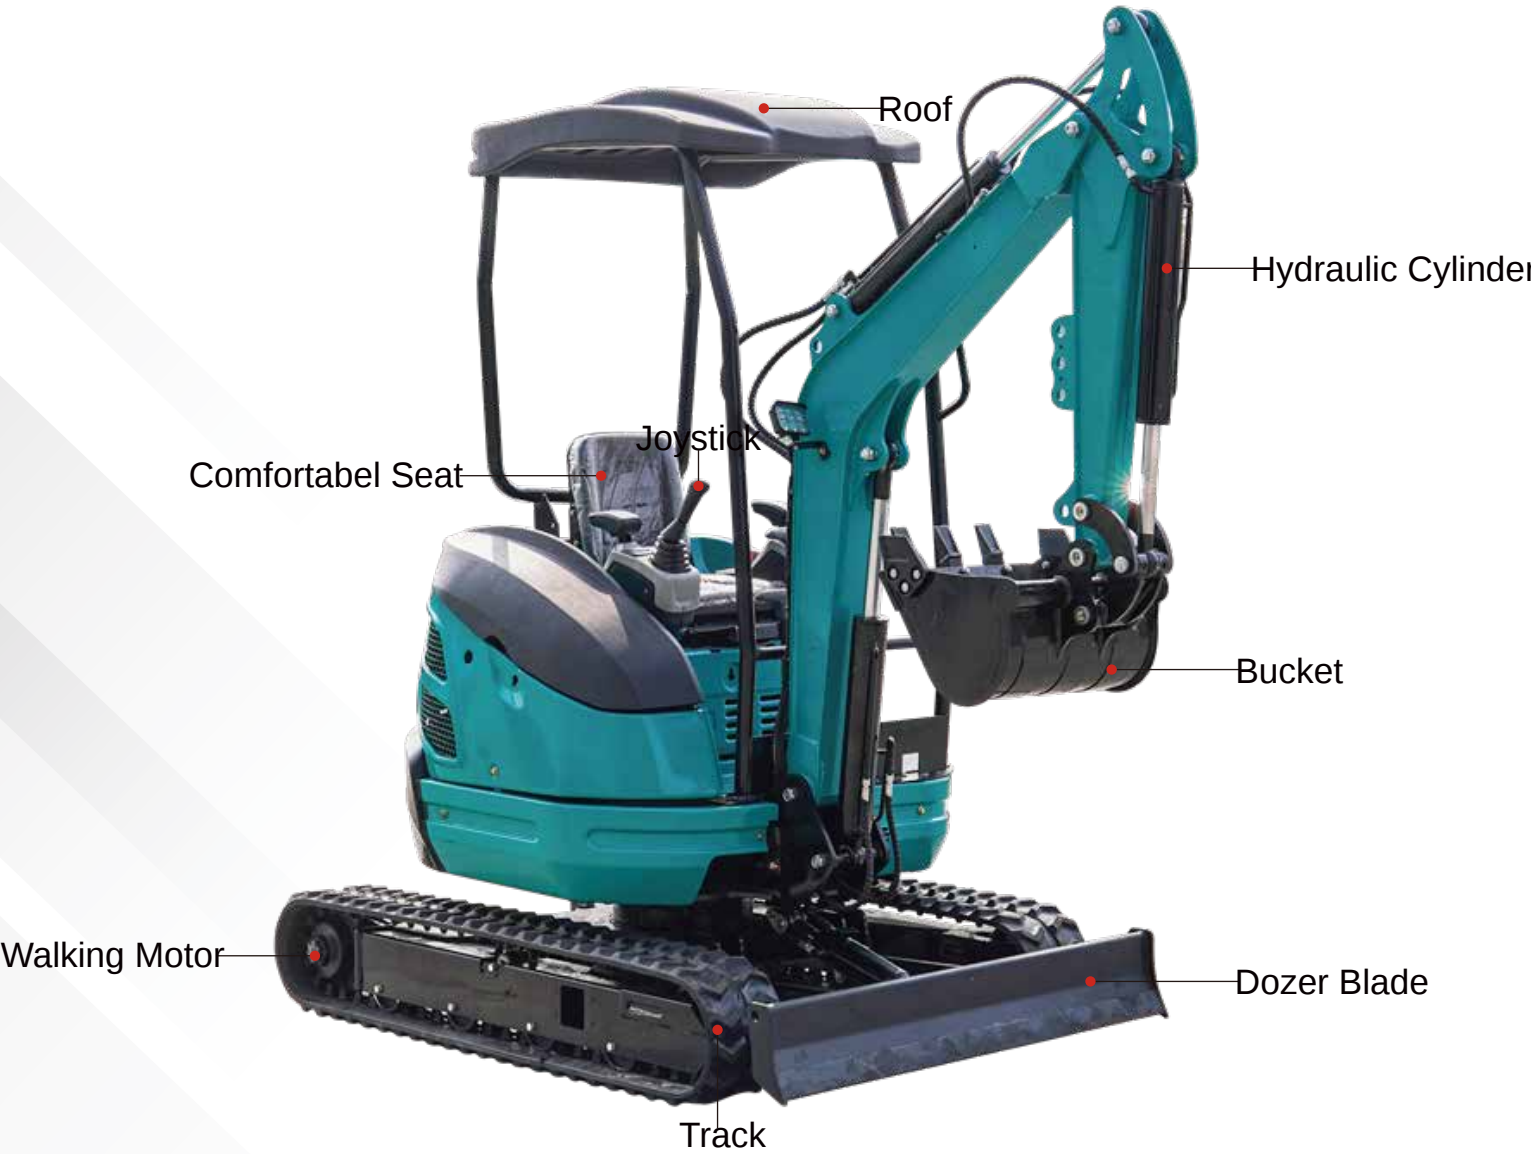

Model	KT-22	Crawler grounding length	1600mm
Operation weigKT	2000KG	Crawler width	230mm
Engine	Kubota/yanmar	Max digging heigKT	3200mm
Power	11.9kw/11.2kw	Max discharge heigKT	2450mm
Bucket capacity	0.05CBM	Max digging depth	2350mm
Rotation speed	9r/min	Max digging radius	3360mm
Overall dimension	3350*1150*2300mm	Mini turning radius	1350mm

Product introduction :



Engine compartment



Hydraulic pilot operation



Hydraulic cylinder



Bucket (replaceable accessories)



Excavator ceiling



Wear-resistant rubber tracks



KT-25 EXCAVATOR

Shandong Hilt Machinery Co., Ltd.



Model	KT-25	Crawler grounding length	1300mm
Operation weigKT	2500kg	Crawler width	180mm
Engine	Kubota	Max digging heigKT	3200mm
Power	10kw/10.3kw	Max discharge heigKT	2300mm
Bucket capacity	0.05CBM	Max digging depth	2200mm
Rotation speed	9r/min	Max digging radius	3360mm
Overall dimension	3250*1100*2300mm	Mini turning radius	1350mm

Product introduction :



Engine compartment



Toyota seats



Hydraulic cylinder



Bucket (replaceable accessories)



Excavator ceiling




Wear-resistant rubber tracks



KT-25 EXCAVATOR

Shandong Hilt Machinery Co., Ltd.

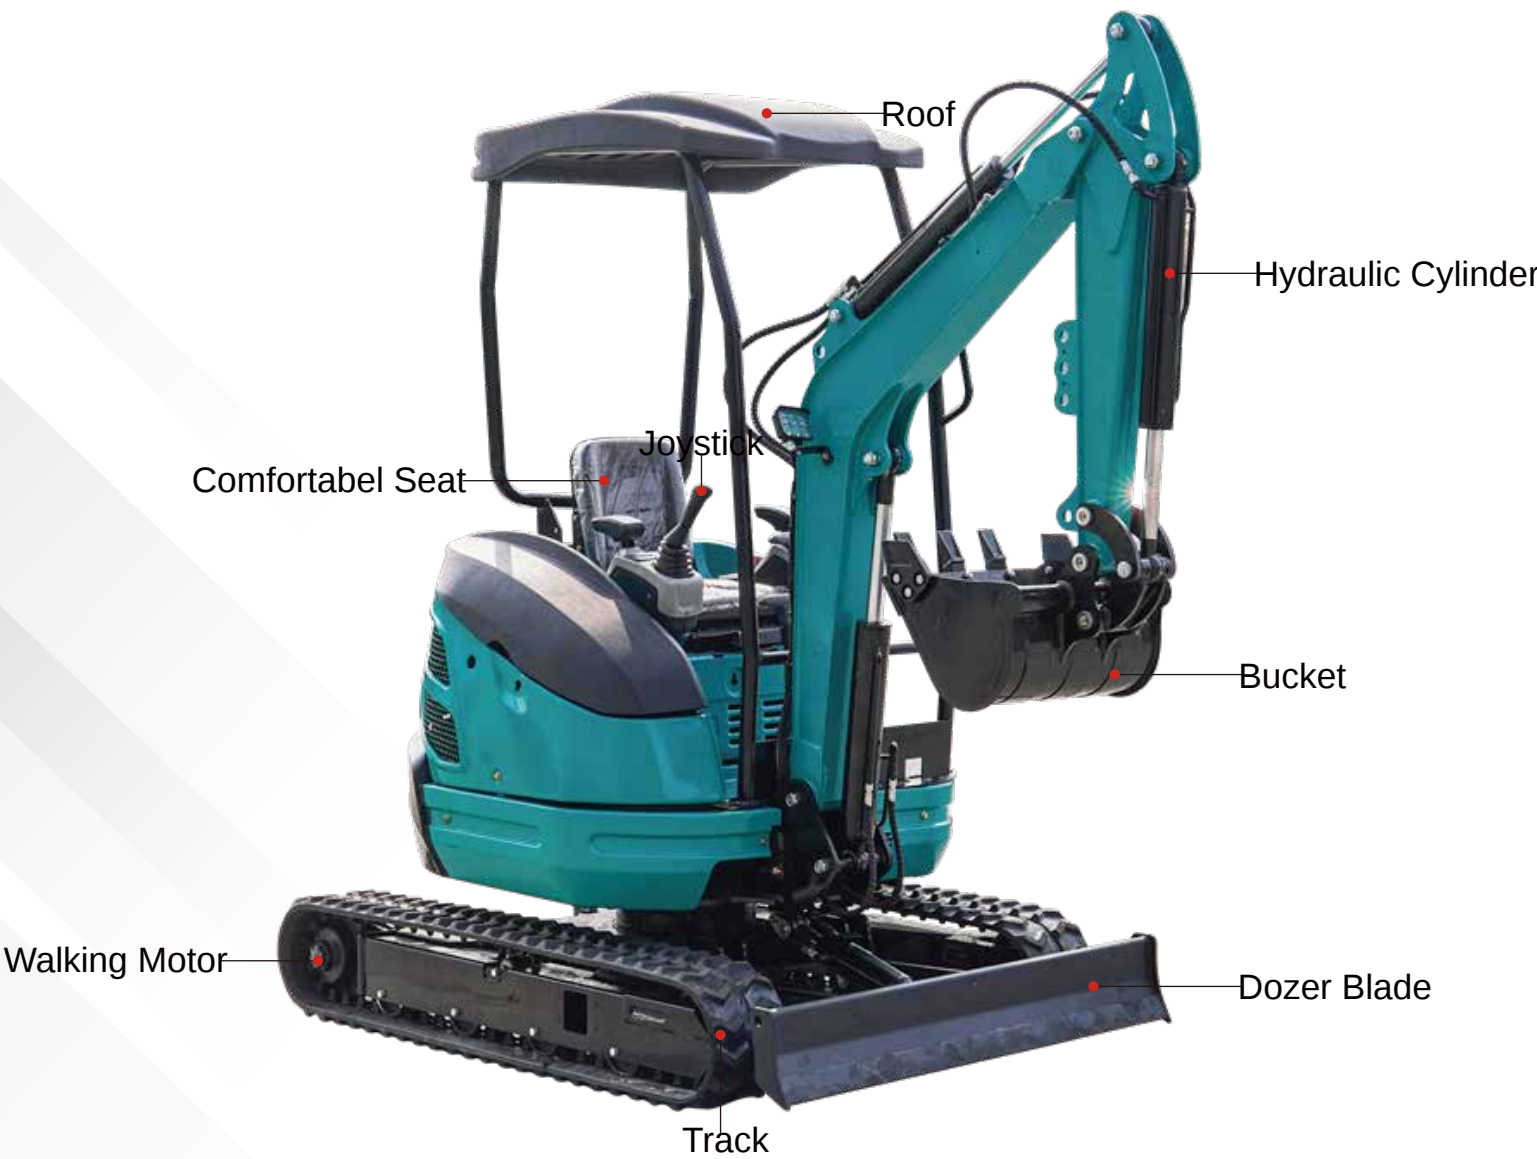

Model	KT-25	Crawler grounding length	1600mm
Operation weigKT	2500KG	Crawler width	230mm
Engine	Kubota/yanmar	Max digging heigKT	3200mm
Power	11.9kw/11.2kw	Max discharge heigKT	2450mm
Bucket capacity	0.05CBM	Max digging depth	2350mm
Rotation speed	9r/min	Max digging radius	3360mm
Overall dimension	3350*1150*2300mm	Mini turning radius	1350mm

Product introduction :



Engine compartment



Hydraulic pilot operation



Hydraulic cylinder



Bucket (replaceable accessories)



Excavator ceiling



Wear-resistant rubber tracks




KT-25 EXCAVATOR

Shandong Hilt Machinery Co., Ltd.




Model	KT-25	Max.Digging Depth	2200mm
Engine	Kubota D1703	Max.Digging HeigKT	3200mm
Power	18.2kw/25HP	Max.Dumping HeigKT	2150mm
Bucket Capacity	0.1m³	Total Length	3750mm
Driving Speed	1.5-2km/h	Total Width	1400mm
Driving Slope	30°	Total HeigKT	2400mm

Product introduction:

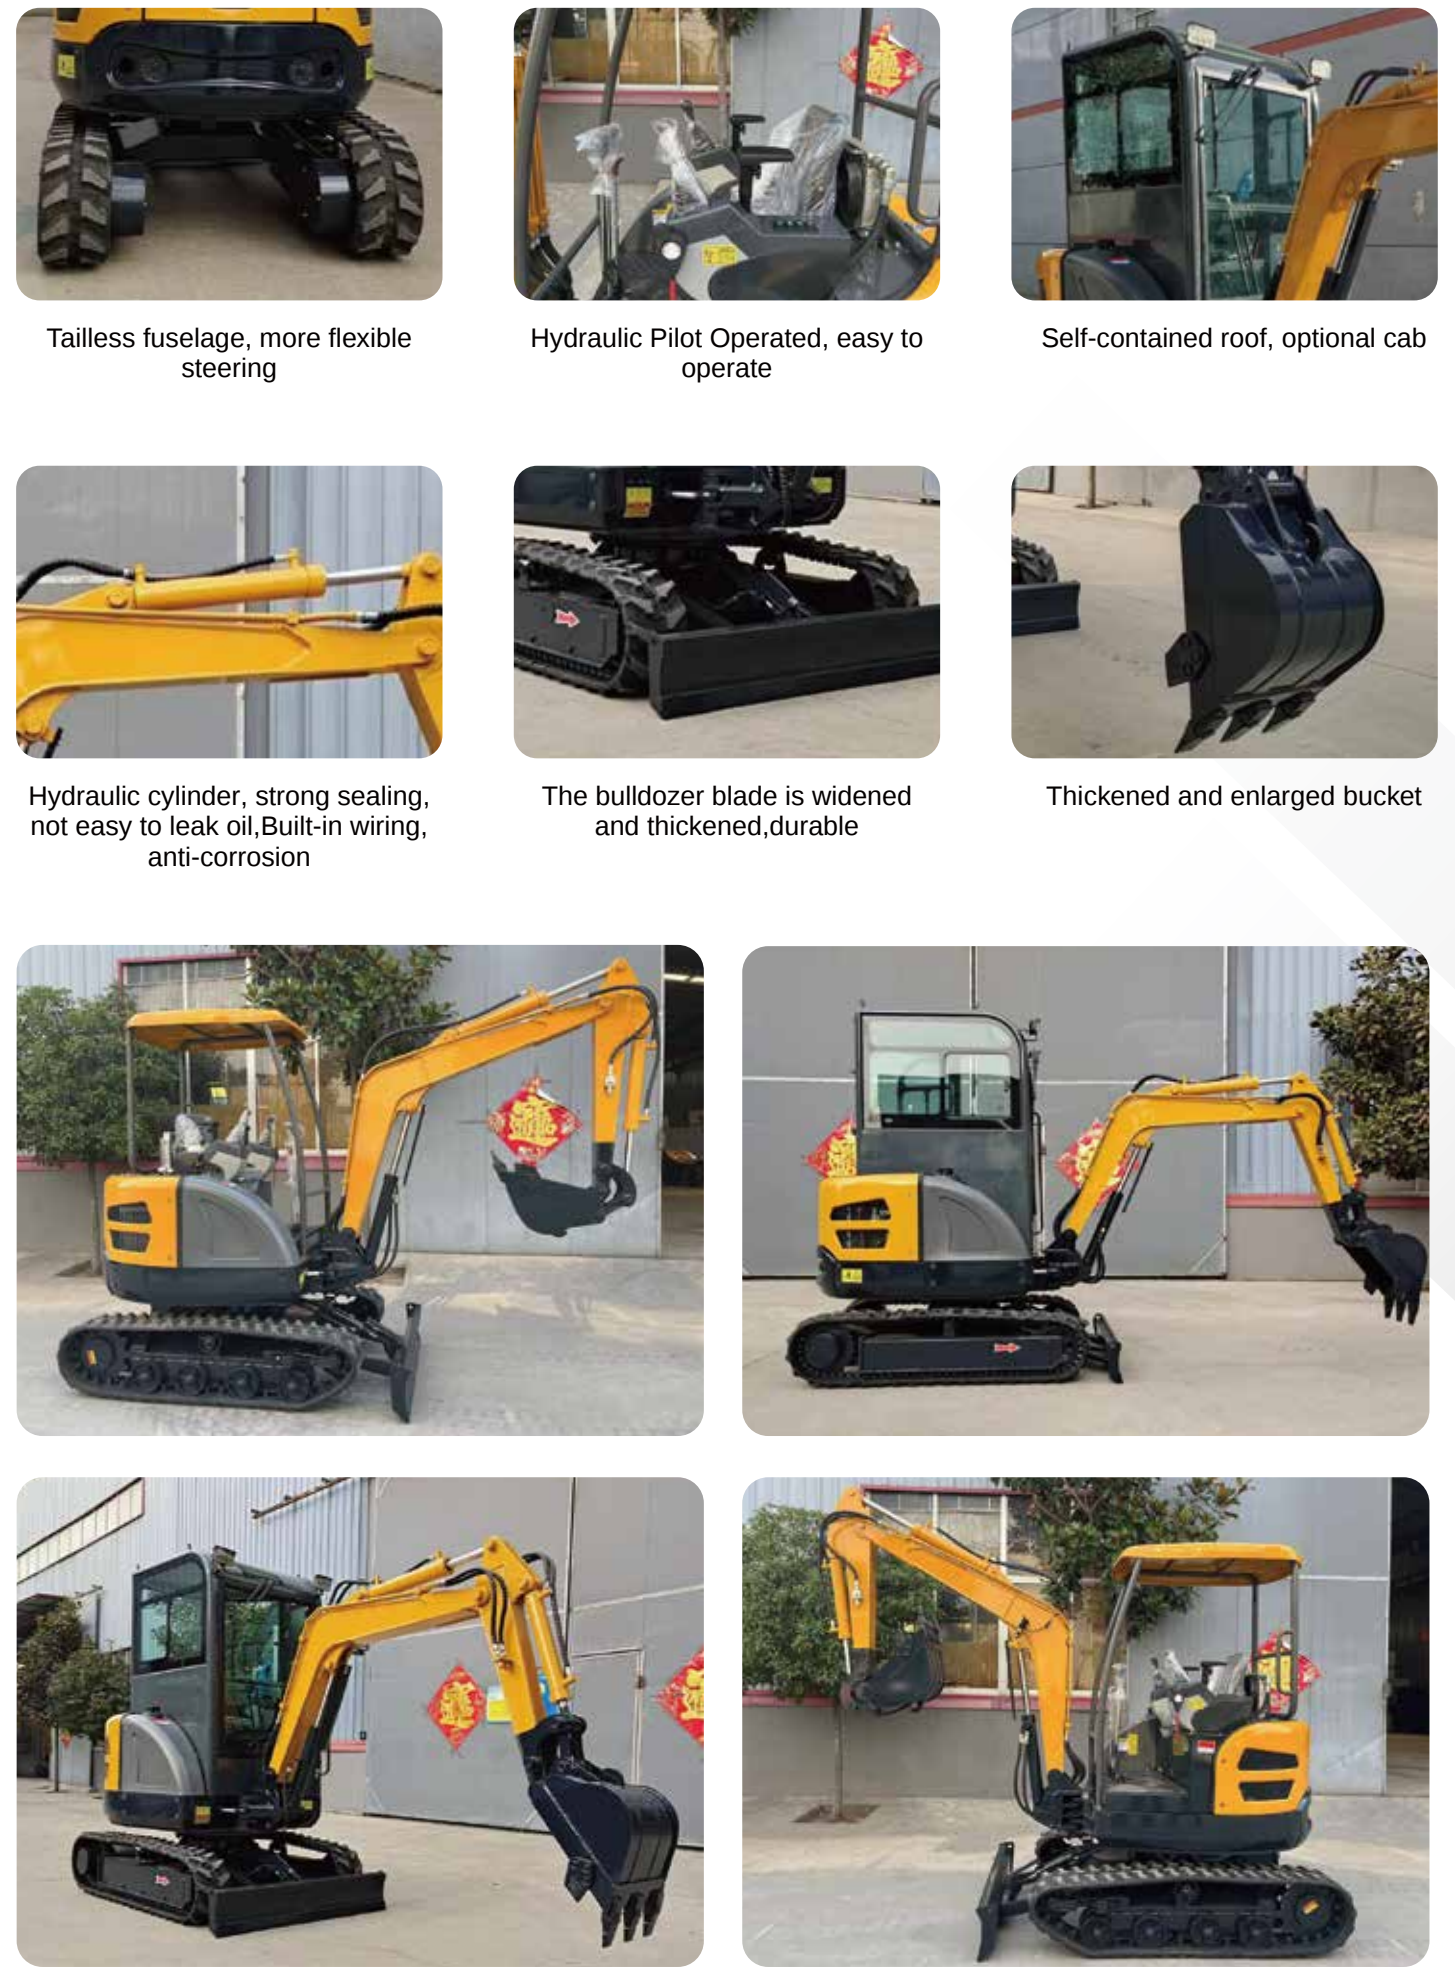

KT-30 EXCAVATOR

Shandong Hilt Machinery Co., Ltd.

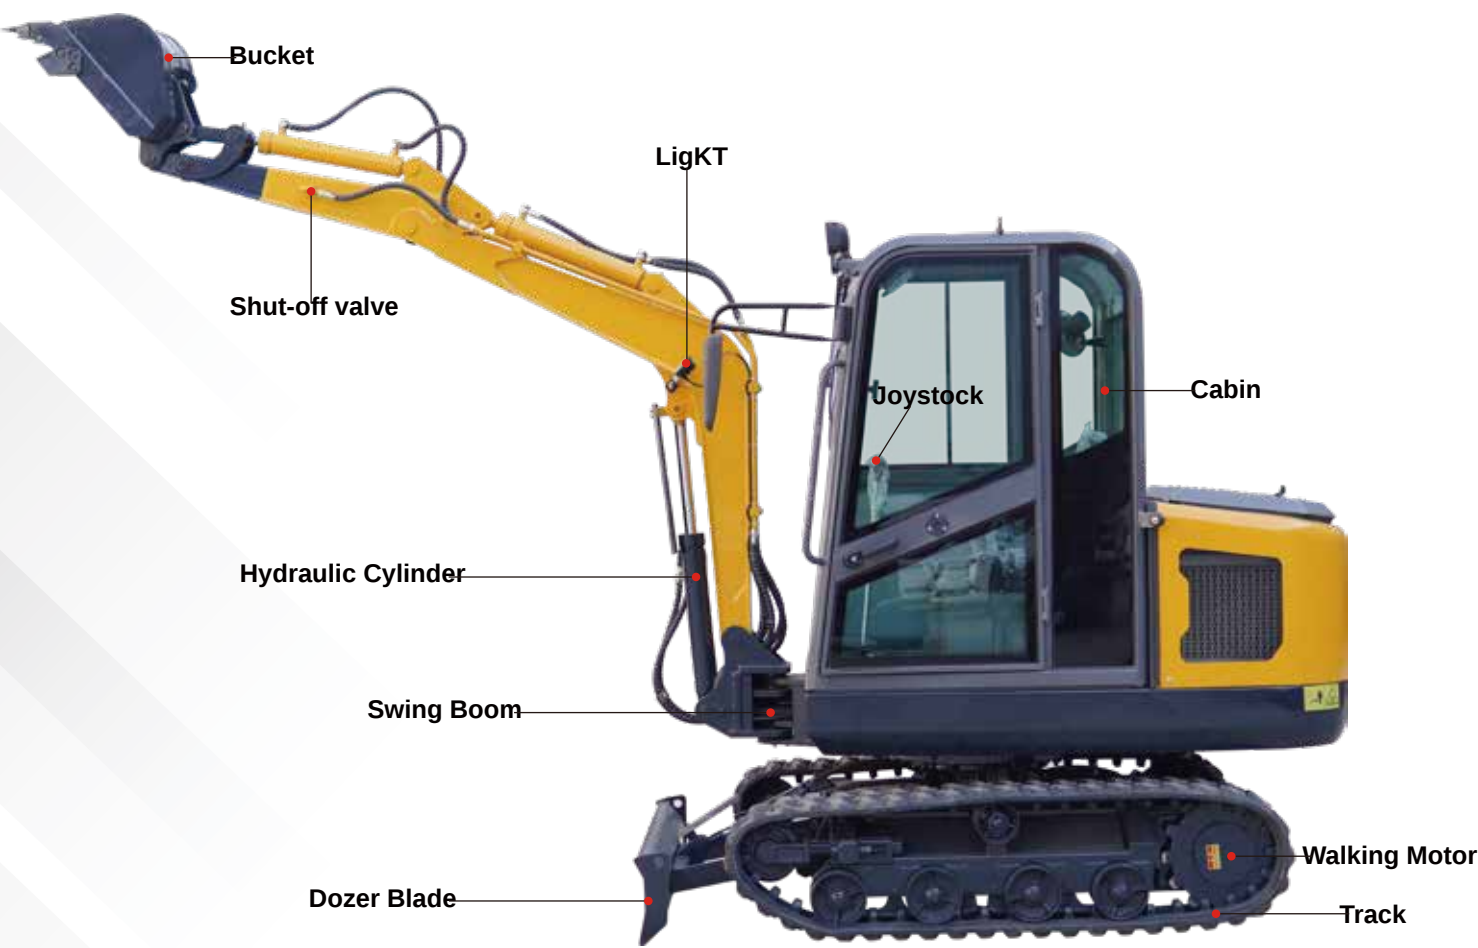

Model	KT-30	Max.Digging Depth	2350mm
Engine	LaiDong385(Three-cylinder)	Max.Digging HeigKT	3200mm
Power	22.1kw/30HP	Max.Dumping HeigKT	2450mm
Bucket Capacity	0.1m³	Total Length	4200mm
Driving Speed	1.5-2km/h	Total Width	1300mm
Driving Slope	30°	Total HeigKT	2300mm

Product introduction:



Brand engine, low temperature working, energy saving and fuel saving, soft and powerful action, fast driving speed



The bulldozer blade is widened and thickened,durable



Thickened and enlarged bucket



Hydraulic cylinder, strong sealing, not easy to leak oil,Built-in wiring, anti-corrosion



Cylinder protective cover to prevent bumping and protect the cylinder from damage




Side swing of the upper arm, 60° left and right



KT-35 EXCAVATOR

Shandong Hilt Machinery Co., Ltd.

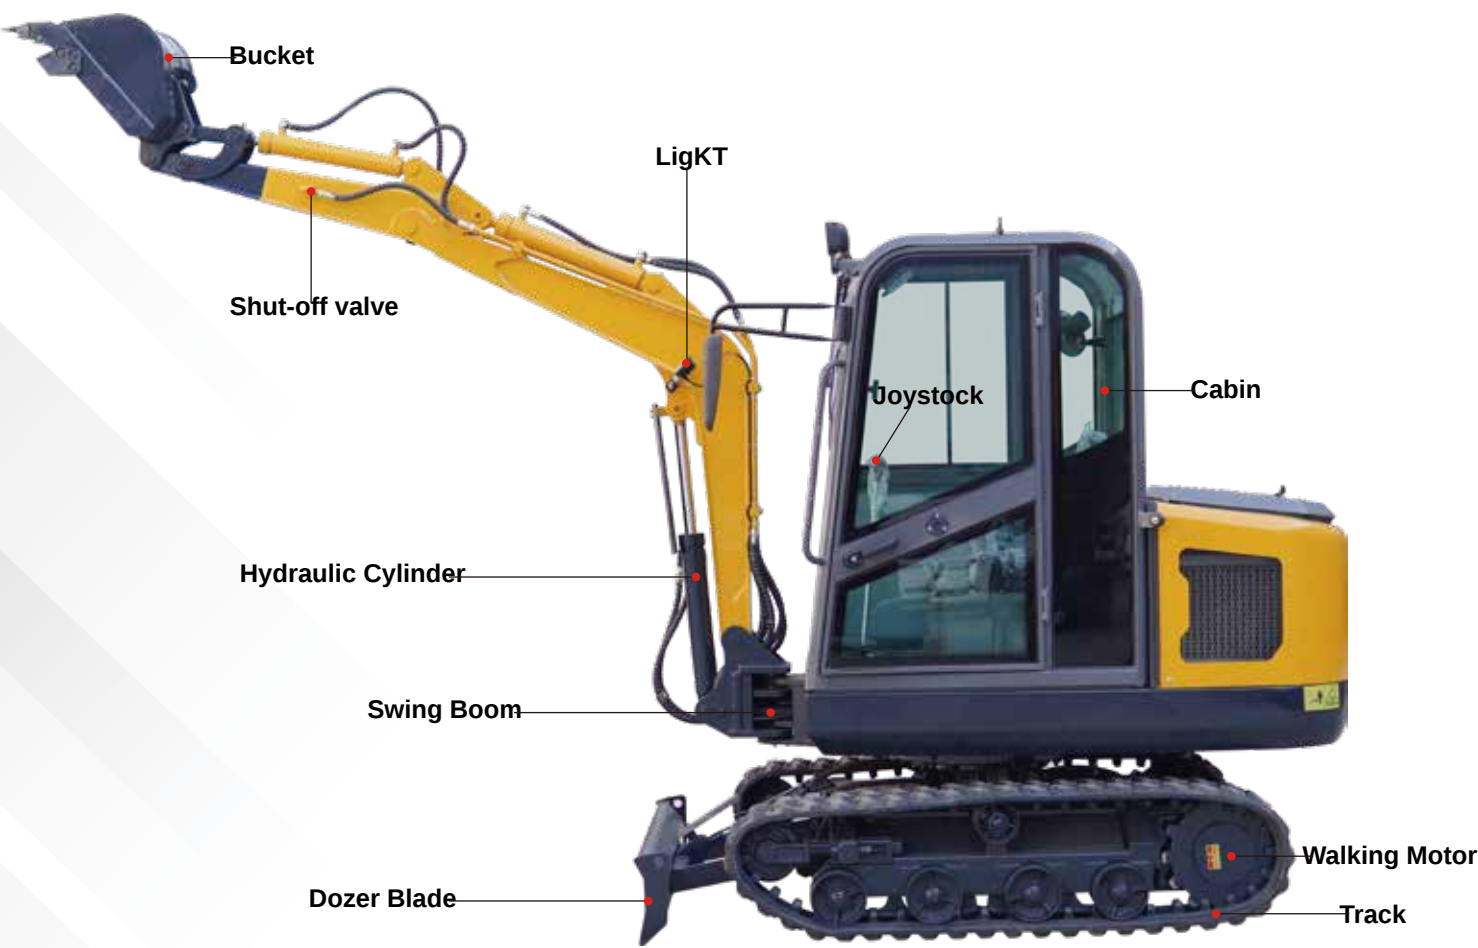


Model	KT-35	Max.Digging Depth	2350mm
Engine	LaiDong385(Three-cylinder)	Max.Digging HeigKT	3200mm
Power	22.1kw/30HP	Max.Dumping HeigKT	2450mm
Bucket Capacity	0.1m³	Total Length	4200mm
Driving Speed	1.5-2km/h	Total Width	1300mm
Driving Slope	30°	Total HeigKT	2300mm

Product introduction



Brand engine, low temperature working, energy saving and fuel saving, soft and powerful action, fast driving speed

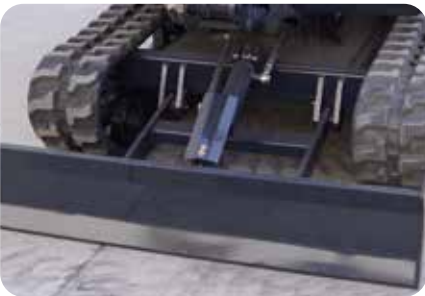

The bulldozer blade is widened and thickened,durable



Thickened and enlarged bucket



Hydraulic cylinder, strong sealing, not easy to leak oil,Built-in wiring, anti-corrosion



Cylinder protective cover to prevent bumping and protect the cylinder from damage



Side swing of the upper arm, 60° left and right



KT-35 EXCAVATOR

Shandong Hilt Machinery Co., Ltd.



Model	KT-35	Max.Digging Depth	3208mm
Engine	Kubota D1703	Max.Digging HeigKT	4800mm
Power	18.2kw/25HP	Max.Dumping HeigKT	3406mm
Bucket Capacity	0.1m³	Total Length	4915mm
Driving Speed	1.5-2.5km/h	Total Width	1720mm
Driving Slope	30°	Total HeigKT	2524mm

Product introduction:



Kubota engine, low temperature work, energy saving and fuel saving, soft and powerful action, fast driving speed



The bulldozer blade is widened and thickened,durable,Wear-resistant thickened track



Thickened and enlarged bucket



Hydraulic cylinder, strong sealing, not easy to leak oil,Built-in wiring, anti-corrosion



Tailless fuselage, flexible steering



Hydraulic Pilot Operated, easy to operate



KT-40 EXCAVATOR

Shandong Hilt Machinery Co., Ltd.



Model	KT-40	Max.Digging Depth	3208mm
Engine	Kubota D1703	Max.Digging HeigKT	4800mm
Power	18.2kw/25HP	Max.Dumping HeigKT	3406mm
Bucket Capacity	0.1m³	Total Length	4915mm
Driving Speed	1.5-2.5km/h	Total Width	1720mm
Driving Slope	30°	Total HeigKT	2524mm

Product introduction:



Kubota engine, low temperature work, energy saving and fuel saving, soft and powerful action, fast driving speed



The bulldozer blade is widened and thickened,durable,Wear-resistant thickened track



Thickened and enlarged bucket



Hydraulic cylinder, strong sealing, not easy to leak oil,Built-in wiring, anti-corrosion



Tailless fuselage, flexible steering



Hydraulic Pilot Operated, easy to operate

